

## PIPELINE ACCELERATOR AND RELATED COMPUTER AND METHOD

Publication number: EP1573514 (A2)

Publication date: 2005-09-14

Inventor(s): SCHULZ KENNETH R [US]; RAPP JOHN W [US];  
JACKSON LARRY [US]; JONES MARK [US]; CHERASARO  
TROY [US]

Applicant(s): LOCKHEED CORP [US]

Classification:

- International: G06F15/80; G06F9/30; G06F3/38; G06F9/445; G06F9/46;  
G06F15/78; G06F15/78; G06F9/30; G06F9/38; G06F9/445;  
G06F9/46; (IPC 1-7); G06F9/38

- European: G06F9/3834

Application number: EP20030781550 20031031

Priority number(s): WO20030534555 20031031; US20020422503P 20021031;  
US20030683929 20031009; US20030683932 20031009;  
US20030684053 20031009; US20030684057 20031009;  
US20030684102 20031009

Also published as:

 WO2004042560 (A2)  
 WO2004042560 (A3)  
 WO2004042574 (A2)  
 WO2004042574 (A3)  
 WO2004042569 (A2)

more &gt;&gt;

Abstract not available for EP 1573514 (A2)

Abstract of corresponding document: WO 2004042560 (A2)

A peer-vector machine includes a host processor and a hardwired pipeline accelerator. The host processor executes a program, and, in response to the program, generates host data, and the pipeline accelerator generates pipeline data from the host data. Alternatively, the pipeline accelerator generates the pipeline data, and the host processor generates the host data from the pipeline data. Because the peer-vector machine includes both a processor and a pipeline accelerator, it can often process data more efficiently than a machine that includes only processors or only accelerators. For example, one can design the peer-vector machine so that the host processor performs decision-making and non-mathematically intensive operations and the accelerator performs non-decision-making and mathematically intensive operations. By shifting the mathematically intensive operations to the accelerator, the peer-vector machine often can, for a given clock frequency, process data at a speed that surpasses the speed at which a processor-only machine can process the data.

Data supplied from the esp@cenet database — Worldwide

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Veröffentlichungsnummer:  
(11) Publication number:  
(11) Numéro de publication:

**EP 1 573 514 A0**

Internationale Anmeldung veröffentlicht durch die  
Weltorganisation für geistiges Eigentum unter der Nummer:

**WO 2004/042561** (art. 158 des EPÜ).

International application published by the World  
Intellectual Property Organisation under number:

**WO 2004/042561** (art. 158 of the EPC).

Demande internationale publiée par l'Organisation  
Mondiale de la Propriété sous le numéro:

**WO 2004/042561** (art. 158 de la CBE).

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/042561 A2**

(51) International Patent Classification<sup>7</sup>: **G06F 9/38**

Crest Road, Manassas, VA 20110 (US); JACKSON, Larry [US/US]; 13093 Crestbrook Drive, Manassas, VA 20120 (US); JONES, Mark [US/US]; 15342 Oakmere Place, Centerville, VA 20120 (US); CHERASARO, Troy [US/US]; 1524 Kestral Court, Culpeper, VA 22701 (US).

(21) International Application Number:  
PCT/US2003/034555

(22) International Filing Date: 31 October 2003 (31.10.2003)

(74) Agents: SANTARELLI, Bryan, A. et al., Graybeal Jackson Haley LLP, 155-108th Avenue NE, Suite 350, Bellevue, WA 98004 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
00/422,503 31 October 2002 (31.10.2002) US  
10/683,929 9 October 2003 (09.10.2003) US  
10/683,932 9 October 2003 (09.10.2003) US  
10/684,053 9 October 2003 (09.10.2003) US  
10/684,057 9 October 2003 (09.10.2003) US  
10/684,102 9 October 2003 (09.10.2003) US

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US 60/422,503 (CIP)  
Filed on 31 October 2002 (31.10.2002)

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, DR, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): LOCKHEED MARTIN CORPORATION [US/US]; Building 480, Mail Drop 043, 9500 Godwin Drive, Manassas, VA 20110 (US).

#### Published:

without international search report and to be republished upon receipt of that report

(72) Inventors; and

(75) Inventors/Applicants (for US only): SCHULZ, Kenneth, R. [US/US]; 10506 Golden Autumn Court, Manassas, VA 20112 (US); RAPP, John, W. [US/US]; 9350 River

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PIPELINE ACCELERATOR HAVING MULTIPLE PIPELINE UNITS AND RELATED COMPUTING MACHINE AND METHOD

(57) Abstract: A pipeline accelerator includes a bus and a plurality of pipeline units, each unit coupled to the bus and including at least one respective hardwired pipeline circuit. By including a plurality of pipeline units in the pipeline accelerator, one can increase the accelerator's data-processing performance as compared to a single-pipeline unit accelerator. Furthermore, by designing the pipeline units so that they communicate via a common bus, one can alter the number of pipeline units, and thus alter the configuration and functionality of the accelerator, by merely coupling or uncoupling pipeline units to or from the bus. This eliminates the need to design or redesign the pipeline-unit interfaces each time one alters one of the pipeline units or alters the number of pipeline units within the accelerator.

WO 2004/042561 A2

# PIPELINE ACCELERATOR HAVING MULTIPLE PIPELINE UNITS AND RELATED COMPUTING MACHINE AND METHOD

## CLAIM OF PRIORITY

- [1] This application claims priority to U.S. Provisional Application Serial  
5 No. 60/422,503, filed on October 31, 2002, which is incorporated by reference.

## CROSS REFERENCE TO RELATED APPLICATIONS

- [2] This application is related to U.S. Patent App. Serial Nos. 10/684,102  
entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND  
METHOD, 10/684,053 entitled COMPUTING MACHINE HAVING IMPROVED  
10 COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD,  
10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING  
ARCHITECTURE AND RELATED SYSTEM AND METHOD, and 10/684,057 entitled  
PROGRAMMABLE CIRCUIT AND RELATED COMPUTING MACHINE AND  
METHOD, all filed on October 9, 2003, and having a common owner, and which are  
15 incorporated by reference.

## BACKGROUND

- [3] A common computing architecture for processing relatively large  
amounts of data in a relatively short period of time includes multiple interconnected  
processors that share the processing burden. By sharing the processing burden,  
20 these multiple processors can often process the data more quickly than a single  
processor can for a given clock frequency. For example, each of the processors can  
process a respective portion of the data or execute a respective portion of a  
processing algorithm.

- [4] FIG. 1 is a schematic block diagram of a conventional computing  
25 machine 10 having a multi-processor architecture. The machine 10 includes a  
master processor 12 and coprocessors 14<sub>1</sub> – 14<sub>n</sub>, which communicate with each  
other and the master processor via a bus 16, an input port 18 for receiving raw data  
from a remote device (not shown in FIG. 1), and an output port 20 for providing  
processed data to the remote source. The machine 10 also includes a memory 22  
30 for the master processor 12, respective memories 24<sub>1</sub> – 24<sub>n</sub> for the coprocessors 14<sub>1</sub>  
– 14<sub>n</sub>, and a memory 26 that the master processor and coprocessors share via the

bus 16. The memory 22 serves as both a program and a working memory for the master processor 12, and each memory  $24_1 - 24_n$  serves as both a program and a working memory for a respective coprocessor  $14_1 - 14_n$ . The shared memory 26 allows the master processor 12 and the coprocessors 14 to transfer data among themselves, and from/to the remote device via the ports 18 and 20, respectively. The master processor 12 and the coprocessors 14 also receive a common clock signal that controls the speed at which the machine 10 processes the raw data.

[5] In general, the computing machine 10 effectively divides the processing of raw data among the master processor 12 and the coprocessors 14. The remote source (not shown in FIG. 1) such as a sonar array loads the raw data via the port 18 into a section of the shared memory 26, which acts as a first-in-first-out (FIFO) buffer (not shown) for the raw data. The master processor 12 retrieves the raw data from the memory 26 via the bus 16, and then the master processor and the coprocessors 14 process the raw data, transferring data among themselves as necessary via the bus 16. The master processor 12 loads the processed data into another FIFO buffer (not shown) defined in the shared memory 26, and the remote source retrieves the processed data from this FIFO via the port 20.

[6] In an example of operation, the computing machine 10 processes the raw data by sequentially performing  $n + 1$  respective operations on the raw data, where these operations together compose a processing algorithm such as a Fast Fourier Transform (FFT). More specifically, the machine 10 forms a data-processing pipeline from the master processor 12 and the coprocessors 14. For a given frequency of the clock signal, such a pipeline often allows the machine 10 to process the raw data faster than a machine having only a single processor.

[7] After retrieving the raw data from the raw-data FIFO (not shown) in the memory 26, the master processor 12 performs a first operation, such as a trigonometric function, on the raw data. This operation yields a first result, which the processor 12 stores in a first-result FIFO (not shown) defined within the memory 26. Typically, the processor 12 executes a program stored in the memory 22, and performs the above-described actions under the control of the program. The

processor **12** may also use the memory **22** as working memory to temporarily store data that the processor generates at intermediate intervals of the first operation.

[8] Next, after retrieving the first result from the first-result FIFO (not shown) in the memory **26**, the coprocessor **14<sub>i</sub>** performs a second operation, such as a logarithmic function, on the first result. This second operation yields a second result, which the coprocessor **14<sub>i</sub>** stores in a second-result FIFO (not shown) defined within the memory **26**. Typically, the coprocessor **14<sub>i</sub>** executes a program stored in the memory **24<sub>i</sub>**, and performs the above-described actions under the control of the program. The coprocessor **14<sub>i</sub>** may also use the memory **24<sub>i</sub>** as working memory to temporarily store data that the coprocessor generates at intermediate intervals of the second operation.

[9] Then, the coprocessors **24<sub>2</sub> – 24<sub>n</sub>** sequentially perform third –  $n^{\text{th}}$  operations on the second –  $(n-1)^{\text{th}}$  results in a manner similar to that discussed above for the coprocessor **24<sub>1</sub>**.

[10] The  $n^{\text{th}}$  operation, which is performed by the coprocessor **24<sub>n</sub>**, yields the final result, *i.e.*, the processed data. The coprocessor **24<sub>n</sub>** loads the processed data into a processed-data FIFO (not shown) defined within the memory **26**, and the remote device (not shown in FIG. 1) retrieves the processed data from this FIFO.

[11] Because the master processor **12** and coprocessors **14** are simultaneously performing different operations of the processing algorithm, the computing machine **10** is often able to process the raw data faster than a computing machine having a single processor that sequentially performs the different operations. Specifically, the single processor cannot retrieve a new set of the raw data until it performs all  $n + 1$  operations on the previous set of raw data. But using the pipeline technique discussed above, the master processor **12** can retrieve a new set of raw data after performing only the first operation. Consequently, for a given clock frequency, this pipeline technique can increase the speed at which the machine **10** processes the raw data by a factor of approximately  $n + 1$  as compared to a single-processor machine (not shown in FIG. 1).

[12] Alternatively, the computing machine **10** may process the raw data in parallel by simultaneously performing  $n + 1$  instances of a processing algorithm,

such as an FFT, on the raw data. That is, if the algorithm includes  $n + 1$  sequential operations as described above in the previous example, then each of the master processor **12** and the coprocessors **14** sequentially perform all  $n + 1$  operations on respective sets of the raw data. Consequently, for a given clock frequency, this parallel-processing technique, like the above-described pipeline technique, can increase the speed at which the machine **10** processes the raw data by a factor of approximately  $n + 1$  as compared to a single-processor machine (not shown in FIG. 1).

[13] Unfortunately, although the computing machine **10** can process data more quickly than a single-processor computing machine (not shown in FIG. 1), the data-processing speed of the machine **10** is often significantly less than the frequency of the processor clock. Specifically, the data-processing speed of the computing machine **10** is limited by the time that the master processor **12** and coprocessors **14** require to process data. For brevity, an example of this speed limitation is discussed in conjunction with the master processor **12**, although it is understood that this discussion also applies to the coprocessors **14**. As discussed above, the master processor **12** executes a program that controls the processor to manipulate data in a desired manner. This program includes a sequence of instructions that the processor **12** executes. Unfortunately, the processor **12** typically requires multiple clock cycles to execute a single instruction, and often must execute multiple instructions to process a single value of data. For example, suppose that the processor **12** is to multiply a first data value A (not shown) by a second data value B (not shown). During a first clock cycle, the processor **12** retrieves a multiply instruction from the memory **22**. During second and third clock cycles, the processor **12** respectively retrieves A and B from the memory **26**. During a fourth clock cycle, the processor **12** multiplies A and B, and, during a fifth clock cycle, stores the resulting product in the memory **22** or **26** or provides the resulting product to the remote device (not shown). This is a best-case scenario, because in many cases the processor **12** requires additional clock cycles for overhead tasks such as initializing and closing counters. Therefore, at best the processor **12** requires five clock cycles, or an average of 2.5 clock cycles per data value, to process A and B..

[14] Consequently, the speed at which the computing machine **10** processes data is often significantly lower than the frequency of the clock that drives the master processor **12** and the coprocessors **14**. For example, if the processor **12** is clocked at 1.0 Gigahertz (GHz) but requires an average of 2.5 clock cycles per data value, then the effective data-processing speed equals  $(1.0 \text{ GHz})/2.5 = 0.4$  GHz. This effective data-processing speed is often characterized in units of operations per second. Therefore, in this example, for a clock speed of 1.0 GHz, the processor **12** would be rated with a data-processing speed of 0.4 Gigaoperations/second (Gops).

10 [15] FIG. 2 is a block diagram of a hardwired data pipeline **30** that can typically process data faster than a processor can for a given clock frequency, and often at substantially the same rate at which the pipeline is clocked. The pipeline **30** includes operator circuits **32<sub>1</sub> – 32<sub>n</sub>**, which each perform a respective operation on respective data without executing program instructions. That is, the desired  
15 operation is “burned in” to a circuit **32** such that it implements the operation automatically, without the need of program instructions. By eliminating the overhead associated with executing program instructions, the pipeline **30** can typically perform more operations per second than a processor can for a given clock frequency.

[16] For example, the pipeline **30** can often solve the following equation  
20 faster than a processor can for a given clock frequency:

$$Y(x_k) = (5x_k + 3)2^{x_k}$$

where  $x_k$  represents a sequence of raw data values. In this example, the operator circuit **32<sub>1</sub>** is a multiplier that calculates  $5x_k$ , the circuit **32<sub>2</sub>** is an adder that calculates  $5x_k + 3$ , and the circuit **32<sub>n</sub>** ( $n = 3$ ) is a multiplier that calculates  $(5x_k + 3)2^{x_k}$ .

25 [17] During a first clock cycle  $k=1$ , the circuit **32<sub>1</sub>** receives data value  $x_1$  and multiplies it by 5 to generate  $5x_1$ .

[18] During a second clock cycle  $k = 2$ , the circuit **32<sub>2</sub>** receives  $5x_1$  from the circuit **32<sub>1</sub>** and adds 3 to generate  $5x_1 + 3$ . Also, during the second clock cycle, the circuit **32<sub>1</sub>** generates  $5x_2$ .

30 [19] During a third clock cycle  $k = 3$ , the circuit **32<sub>3</sub>** receives  $5x_1 + 3$  from the circuit **32<sub>2</sub>** and multiplies by  $2^{x_1}$  (effectively left shifts  $5x_1 + 3$  by  $x_1$ ) to generate the



first result  $(5x_1 + 3)2^{x_1}$ . Also during the third clock cycle, the circuit **32**<sub>1</sub> generates  $5x_3$  and the circuit **32**<sub>2</sub> generates  $5x_2 + 3$ .

**[20]** The pipeline **30** continues processing subsequent raw data values  $x_k$  in this manner until all the raw data values are processed.

5 **[21]** Consequently, a delay of two clock cycles after receiving a raw data value  $x_1$  — this delay is often called the latency of the pipeline **30** — the pipeline generates the result  $(5x_1 + 3)2^{x_1}$ , and thereafter generates one result — e.g.,  $(5x_2 + 3)2^{x_2}$ ,  $(5x_3 + 3)2^{x_3}$ , . . . ,  $5x_n + 3)2^{x_n}$  — each clock cycle.

**[22]** Disregarding the latency, the pipeline **30** thus has a data-processing  
10 speed equal to the clock speed. In comparison, assuming that the master processor **12** and coprocessors **14** (FIG. 1) have data-processing speeds that are 0.4 times the clock speed as in the above example, the pipeline **30** can process data 2.5 times faster than the computing machine **10** (FIG. 1) for a given clock speed.

**[23]** Still referring to FIG. 2, a designer may choose to implement the  
15 pipeline **30** in a programmable logic IC (PLIC), such as a field-programmable gate array (FPGA), because a PLIC allows more design and modification flexibility than does an application specific IC (ASIC). To configure the hardwired connections within a PLIC, the designer merely sets interconnection-configuration registers disposed within the PLIC to predetermined binary states. The combination of all  
20 these binary states is often called "firmware." Typically, the designer loads this firmware into a nonvolatile memory (not shown in FIG. 2) that is coupled to the PLIC. When one "turns on" the PLIC, it downloads the firmware from the memory into the interconnection-configuration registers. Therefore, to modify the functioning of the PLIC, the designer merely modifies the firmware and allows the PLIC to download  
25 the modified firmware into the interconnection-configuration registers. This ability to modify the PLIC by merely modifying the firmware is particularly useful during the prototyping stage and for upgrading the pipeline **30** "in the field".

**[24]** Unfortunately, the hardwired pipeline **30** may not be the best choice to  
execute algorithms that entail significant decision making, particularly nested  
30 decision making. A processor can typically execute a nested-decision-making instruction (e.g., a nested conditional instruction such as "if A, then do B, else if C,

do D, . . . , else do n") approximately as fast as it can execute an operational instruction (e.g., "A + B") of comparable length. But although the pipeline 30 may be able to make a relatively simple decision (e.g., "A > B?") efficiently, it typically cannot execute a nested decision (e.g., "if A, then do B, else if C, do D, . . . , else do n") as efficiently as a processor can. One reason for this inefficiency is that the pipeline 30 may have little on-board memory, and thus may need to access external working/program memory (not shown). And although one may be able to design the pipeline 30 to execute such a nested decision, the size and complexity of the required circuitry often makes such a design impractical, particularly where an algorithm includes multiple different nested decisions.

[25] Consequently, processors are typically used in applications that require significant decision making, and hardwired pipelines are typically limited to "number crunching" applications that entail little or no decision making.

[26] Furthermore, as discussed below, it is typically much easier for one to design/modify a processor-based computing machine, such as the computing machine 10 of FIG. 1, than it is to design/modify a hardwired pipeline such as the pipeline 30 of FIG. 2, particularly where the pipeline 30 includes multiple PLICs.

[27] Computing components, such as processors and their peripherals (e.g., memory), typically include industry-standard communication interfaces that facilitate the interconnection of the components to form a processor-based computing machine.

[28] Typically, a standard communication interface includes two layers: a physical layer and a services layer.

[29] The physical layer includes the circuitry and the corresponding circuit interconnections that form the interface and the operating parameters of this circuitry. For example, the physical layer includes the pins that connect the component to a bus, the buffers that latch data received from the pins, and the drivers that drive signals onto the pins. The operating parameters include the acceptable voltage range of the data signals that the pins receive, the signal timing for writing and reading data, and the supported modes of operation (e.g., burst

mode, page mode). Conventional physical layers include transistor-transistor logic (TTL) and RAMBUS.

5       **[30]**       The services layer includes the protocol by which a computing component transfers data. The protocol defines the format of the data and the manner in which the component sends and receives the formatted data. Conventional communication protocols include file-transfer protocol (FTP) and transmission control protocol/internet protocol (TCP/IP).

10       **[31]**       Consequently, because manufacturers and others typically design computing components having industry-standard communication interfaces, one can typically design the interface of such a component and interconnect it to other computing components with relatively little effort. This allows one to devote most of his time to designing the other portions of the computing machine, and to easily modify the machine by adding or removing components.

15       **[32]**       Designing a computing component that supports an industry-standard communication interface allows one to save design time by using an existing physical-layer design from a design library. This also insures that he/she can easily interface the component to off-the-shelf computing components.

20       **[33]**       And designing a computing machine using computing components that support a common industry-standard communication interface allows the designer to interconnect the components with little time and effort. Because the components support a common interface, the designer can interconnect them via a system bus with little design effort. And because the supported interface is an industry standard, one can easily modify the machine. For example, one can add different components and peripherals to the machine as the system design evolves, or can easily  
25       add/design next-generation components as the technology evolves. Furthermore, because the components support a common industry-standard services layer, one can incorporate into the computing machine's software an existing software module that implements the corresponding protocol. Therefore, one can interface the components with little effort because the interface design is essentially already in  
30       place, and thus can focus on designing the portions (e.g., software) of the machine that cause the machine to perform the desired function(s).

[34] But unfortunately, there are no known industry-standard services layers for components, such as PLICs, used to form hardwired pipelines such as the pipeline 30 of FIG. 2.

[35] Consequently, to design a pipeline having multiple PLICs, one typically  
5 spends a significant amount of time and exerts a significant effort designing "from scratch" and debugging the services layer of the communication interface between the PLICs. Typically, such an ad hoc services layer depends on the parameters of the data being transferred between the PLICs. Likewise, to design a pipeline that interfaces to a processor, one would have to spend a significant amount of time and  
10 exert a significant effort in designing and debugging the services layer of the communication interface between the pipeline and the processor.

[36] Similarly, to modify such a pipeline by adding a PLIC to it, one typically spends a significant amount of time and exerts a significant effort designing and debugging the services layer of the communication interface between the added  
15 PLIC and the existing PLICs. Likewise, to modify a pipeline by adding a processor, or to modify a computing machine by adding a pipeline, one would have to spend a significant amount of time and exert a significant effort in designing and debugging the services layer of the communication interface between the pipeline and processor.

[37] Consequently, referring to FIGS. 1 and 2, because of the difficulties in interfacing multiple PLICs and in interfacing a processor to a pipeline, one is often forced to make significant tradeoffs when designing a computing machine. For example, with a processor-based computing machine, one is forced to trade number-crunching speed and design/modification flexibility for complex decision-making  
25 ability. Conversely, with a hardwired pipeline-based computing machine, one is forced to trade complex-decision-making ability and design/modification flexibility for number-crunching speed. Furthermore, because of the difficulties in interfacing multiple PLICs, it is often impractical for one to design a pipeline-based machine having more than a few PLICs. As a result, a practical pipeline-based machine often  
30 has limited functionality. And because of the difficulties in interfacing a processor to a PLIC, it would be impractical to interface a processor to more than one PLIC. As a

result, the benefits obtained by combining a processor and a pipeline would be minimal.

- [38] Therefore, a need has arisen for a new computing architecture that allows one to combine the decision-making ability of a processor-based machine  
5 with the number-crunching speed of a hardwired-pipeline-based machine.

#### SUMMARY

- [39] According to an embodiment of the invention, a pipeline accelerator includes a bus and a plurality of pipeline units each coupled to the bus and each including at least one respective hardwired-pipeline circuit.
- 10 [40] By including a plurality of pipeline units in the pipeline accelerator, one can increase the accelerator's data-processing performance as compared to a single-pipeline-unit accelerator. Furthermore, by designing the pipeline units so that they communicate with each other and with other peers via a common bus, one can alter the number of pipeline units, and thus alter the configuration and functionality of  
15 the accelerator, by merely coupling or uncoupling pipeline units to or from the bus. This eliminates the need to design or redesign the pipeline-unit interfaces each time one alters one of the pipeline units or alters the number of pipeline units within the accelerator.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- 20 [41] FIG. 1 is a block diagram of a computing machine having a conventional multi-processor architecture.
- [42] FIG. 2 is a block diagram of a conventional hardwired pipeline.
- [43] FIG. 3 is a block diagram of a computing machine having a peer-vector architecture according to an embodiment of the invention.
- 25 [44] FIG. 4 is a block diagram of a pipeline unit of the pipeline accelerator of FIG. 3 according to an embodiment of the invention.
- [45] FIG. 5 is a block diagram of a pipeline unit of the pipeline accelerator of FIG. 3 according to another embodiment of the invention.

[46] FIG. 6 is a block diagram of the pipeline accelerator of FIG. 3 including multiple pipeline units according to an embodiment of the invention.

[47] FIG. 7 is a block diagram of the pipeline accelerator of FIG. 3 including multiple pipeline units according to another embodiment of the invention.

- 5 [48] FIG. 8 is a block diagram of the pipeline accelerator of FIG. 3 including groups of multiple pipeline units according to an embodiment of the invention.

#### DETAILED DESCRIPTION

- [49] FIG. 3 is a schematic block diagram of a computing machine 40, which has a peer-vector architecture according to an embodiment of the invention. In addition to a host processor 42, the peer-vector machine 40 includes a pipeline accelerator 44, which performs at least a portion of the data processing, and which thus effectively replaces the bank of coprocessors 14 in the computing machine 10 of FIG. 1. Therefore, the host-processor 42 and the accelerator 44 (or units thereof as discussed below) are "peers" that can transfer data vectors back and forth.
- 15 Because the accelerator 44 does not execute program instructions, it typically performs mathematically intensive operations on data significantly faster than a bank of coprocessors can for a given clock frequency. Consequently, by combining the decision-making ability of the processor 42 and the number-crunching ability of the accelerator 44, the machine 40 has the same abilities as, but can often process data
- 20 faster than, a conventional computing machine such as the machine 10. Furthermore, as discussed below, providing the accelerator 44 with a communication interface that is compatible with the communication interface of the host processor 42 facilitates the design and modification of the machine 40, particularly where the processor's communication interface is an industry standard. And where the
- 25 accelerator 44 includes multiple pipeline units (e.g., PLIC-based circuits), providing each of these units with the same communication interface facilitates the design and modification of the accelerator, particularly where the communication interfaces are compatible with an industry-standard interface. Moreover, the machine 40 may also provide other advantages as described below and in the previously cited patent
- 30 applications.

[50] Still referring to FIG. 3, in addition to the host processor 42 and the pipeline accelerator 44, the peer-vector computing machine 40 includes a processor memory 46, an interface memory 48, a pipeline bus 50, one or more firmware memories 52, an optional raw-data input port 54, a processed-data output port 58, and an optional router 61.

[51] The host processor 42 includes a processing unit 62 and a message handler 64, and the processor memory 46 includes a processing-unit memory 66 and a handler memory 68, which respectively serve as both program and working memories for the processor unit and the message handler. The processor memory 46 also includes an accelerator-configuration registry 70 and a message-configuration registry 72, which store respective configuration data that allow the host processor 42 to configure the functioning of the accelerator 44 and the format of the messages that the message handler 64 sends and receives.

[52] The pipeline accelerator 44 is disposed on at least one PLIC (FIG. 4) and includes hardwired pipelines 74<sub>1</sub> – 74<sub>n</sub>, which process respective data without executing program instructions. The firmware memory 52 stores the configuration firmware for the accelerator 44. If the accelerator 44 is disposed on multiple PLICs, then these PLICs and their respective firmware memories may be disposed in multiple pipeline units, which are discussed further below in conjunction with FIGS. 4 – 8. Alternatively, the accelerator 44 may be disposed on at least one ASIC, and thus may have internal interconnections that are unconfigurable once the ASIC is formed. In this alternative, the machine 40 may omit the firmware memory 52. Furthermore, although the accelerator 44 is shown including multiple pipelines 74<sub>1</sub>–74<sub>n</sub>, it may include only a single pipeline. In addition, although not shown, the accelerator 44 may include one or more processors such as a digital-signal processor (DSP). Moreover, although not shown, the accelerator 44 may include a data input port and/or a data output port.

[53] And although the host processor 42 and pipeline accelerator 44 are discussed as being disposed on different ICs, the host processor and pipeline accelerator may be disposed on the same IC.

[54] The general operation of the peer-vector machine 40 is discussed in previously cited U.S. Patent App. Serial No. 10/684,102 entitled IMPROVED

COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, the structure and operation of the host processor **42** is discussed in previously cited U.S. Patent App. Serial No. 10/684,053 entitled COMPUTING MACHINE HAVING IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND  
5 METHOD, and the structure and operation of the pipeline accelerator **44** is discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD and below in conjunction with **FIGS. 4 – 8**.

10 **[55]** **FIG. 4** is a block diagram of a unit **78** of the pipeline accelerator **44** of **FIG. 3** according to an embodiment of the invention.

**[56]** The accelerator **44** includes one or more such pipeline units **78** (only one shown in **FIG. 4**), each of which includes a pipeline circuit **80**, such as a PLIC or an ASIC. As discussed further below and in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING  
15 ARCHITECTURE AND RELATED SYSTEM AND METHOD, each pipeline unit **78** is a "peer" of the host processor **42** (**FIG. 3**) and of the other pipeline units of the accelerator **44**. That is, each pipeline unit **78** can communicate directly with the host processor **42** or with any other pipeline unit. Thus, this peer-vector architecture prevents data "bottlenecks" that otherwise might occur if all of the pipeline units **78**  
20 communicated through a central location such as a master pipeline unit (not shown) or the host processor **42**. Furthermore, this architecture allows one to add or remove peers from the peer-vector machine **40** (**FIG. 3**) without significant modifications to the machine.

**[57]** The pipeline circuit **80** includes a communication interface **82**, which  
25 transfers data between a peer, such as the host processor **42** (**FIG. 3**), and the following other components of the pipeline circuit: the hardwired pipelines **74<sub>1</sub>–74<sub>n</sub>** via a communication shell **84**, a pipeline controller **86**, an exception manager **88**, and a configuration manager **90**. The pipeline circuit **80** may also include an industry-standard bus interface **91** and a communication bus **93**, which connects the  
30 interface **82** to the interface **91**. Alternatively, the functionality of the interface **91** may be included within the communication interface **82** and the bus **93** omitted.



[58] By designing the components of the pipeline circuit **80** as separate modules, one can often simplify the design of the pipeline circuit. That is, one can design and test each of these components separately, and then integrate them much like one does when designing software or a processor-based computing system (such as the system **10** of FIG. 1). In addition, one can save in a library (not shown) hardware description language (HDL) that defines these components — particularly components, such as the communication interface **82**, that designers will probably use frequently in other pipeline designs — thus reducing the design and test time of future pipeline designs that use the same components. That is, by using the HDL from the library, the designer need not redesign previously implemented components from scratch, and thus can focus his efforts on the design of components that were not previously implemented, or on the modification of previously implemented components. Moreover, one can save in the library HDL that defines multiple versions of the pipeline circuit **80** or multiple versions of the entire pipeline accelerator **44** so that one can pick and choose among existing designs.

[59] Still referring to FIG. 4, the communication interface **82** sends and receives (via the bus interface **91** of present) data in a format recognized by the message handler **64** (FIG. 3), and thus typically facilitates the design and modification of the peer-vector machine **40** (FIG. 3). For example, if the data format is an industry standard such as the Rapid I/O format, then one need not design a custom interface between the host processor **42** and the pipeline unit **78**. Furthermore, by allowing the pipeline unit **78** to communicate with other peers, such as the host processor **42** (FIG. 3), via the pipeline bus **50** instead of via a non-bus interface, one can change the number of pipeline units by merely connecting or disconnecting them (or the circuit cards that hold them) to the pipeline bus instead of redesigning a non-bus interface from scratch each time a pipeline unit is added or removed.

[60] The hardwired pipelines **74<sub>1</sub>-74<sub>n</sub>** perform respective operations on data as discussed above in conjunction with FIG. 3 and in previously cited U.S. Patent App. Serial Nos. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD and 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED

SYSTEM AND METHOD, and the communication shell **84** interfaces the pipelines to the other components of the pipeline circuit **80** and to other circuits (such as a data memory **92** discussed below) of the pipeline unit **78**.

[61] The controller **86** synchronizes the hardwired pipelines **74<sub>1</sub>–74<sub>n</sub>** in response to SYNC signals and special pipeline-bus communications (*i.e.*, “events”) from other peers, and monitors and controls the sequence in which the pipelines perform their respective data operations. For example, a peer, such as the host processor **42**, may pulse a SYNC signal or send an event to the pipeline unit **78** via the pipeline bus **50** to indicate that the peer has finished sending a block of data to the pipeline unit and to cause the hardwired pipelines **74<sub>1</sub>–74<sub>n</sub>** to begin processing this data. Typically, a SYNC signal is used to synchronize a time-critical operation, and an event is used to synchronize a non-time-critical operation. Typically, an event is a data-less communication that is often called a “doorbell”. But an event may include data, in which case it is often called an “event message”. SYNC signals and events are discussed further in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[62] The exception manager **88** monitors the status of the hardwired pipelines **74<sub>1</sub>–74<sub>n</sub>**, the communication interface **82**, the communication shell **84**, the controller **86**, and the bus interface **91** (if present), and reports exceptions to the host processor **42** (FIG. 3). For example, if a buffer in the communication interface **82** overflows, then the exception manager **88** reports this to the host processor **42**. The exception manager may also correct, or attempt to correct, the problem giving rise to the exception. For example, for an overflowing buffer, the exception manager **88** may increase the size of the buffer, either directly or via the configuration manager **90** as discussed below.

[63] The configuration manager **90** sets the soft configuration of the hardwired pipelines **74<sub>1</sub>–74<sub>n</sub>**, the communication interface **82**, the communication shell **84**, the controller **86**, the exception manager **88**, and the interface **91** (if present) in response to soft-configuration data from the host processor **42** (FIG. 3) — as discussed in previously cited U.S. Patent App. Serial No. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND

METHOD, the hard configuration denotes the actual topology, on the transistor and circuit-block level, of the pipeline circuit **80**, and the soft configuration denotes the physical parameters (e.g., data width, table size) of the hard-configured components. That is, soft configuration data is similar to the data that can be loaded into a register  
5 of a processor (not shown in FIG. 4) to set the operating mode (e.g., burst-memory mode) of the processor. For example, the host processor **42** may send soft-configuration data that causes the configuration manager **90** to set the number and respective priority levels of data and event queues in the communication interface **82**. The exception manager **88** may also send soft-configuration data that  
10 causes the configuration manager **90** to, e.g., increase the size of an overflowing buffer in the communication interface **82**.

[64] The industry-standard bus interface **91** is a conventional bus-interface circuit that reduces the size and complexity of the communication interface **82** by effectively offloading some of the interface circuitry from the communication  
15 interface. Therefore, if one wishes to change the parameters of the pipeline bus **50** or router **61** (FIG. 3), then he need only modify the interface **91** and not the communication interface **82**. Alternatively, one may dispose the interface **91** in an IC (not shown) that is external to the pipeline circuit **80**. Offloading the interface **91** from the pipeline circuit **80** frees up resources on the pipeline circuit for use in, e.g.,  
20 the hardwired pipelines **74<sub>1</sub>-74<sub>n</sub>** and the controller **86**. Or, as discussed above, the bus interface **91** may be part of the communication interface **82**.

[65] Still referring to FIG. 4, in addition to the pipeline circuit **80**, the pipeline unit **78** of the accelerator **44** includes the data memory **92**, and, if the pipeline circuit is a PLIC, a firmware memory **52**.

[66] The data memory **92** buffers data as it flows between another peer, such as the host processor **42** (FIG. 3), and the hardwired pipelines **74<sub>1</sub>-74<sub>n</sub>**, and is also a working memory for the hardwired pipelines. The communication interface **82** interfaces the data memory **92** to the pipeline bus **50** (via the communication bus **94** and industry-standard interface **91** if present), and the communication shell **84**  
30 interfaces the data memory to the hardwired pipelines **74<sub>1</sub>-74<sub>n</sub>**.

[67] The data memory **92** (or other portion of the pipeline unit **78**) may also store a profile of the pipeline unit. The profile describes the pipeline unit **78**

sufficiently for the host processor **42** (**FIG. 3**) to appropriately configure itself, the pipeline unit, and other peers of the peer-vector machine **40** (**FIG. 3**) for intercommunication. For example, the profile may identify the data operations and communication protocols that the pipeline unit **78** is capable of implementing.

- 5 Consequently, by reading the profile during initialization of the peer-vector machine **40**, the host processor **42** can properly configure the message handler **64** (**FIG. 3**) to communicate with the pipeline unit **78**. This technique is analogous to the "plug and play" technique by which a computer can configure itself to communicate with a newly installed peripheral such as a disk drive. Configuration of the host processor
- 10 **42** and pipeline unit **78** are discussed further in previously cited U.S. Patent App. Serial Nos. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD and 10/684,057 entitled PROGRAMMABLE CIRCUIT AND RELATED COMPUTING MACHINE AND METHOD.

- [68] As discussed above in conjunction with **FIG. 3**, where the pipeline
- 15 circuit **80** is a PLIC, the firmware memory **52** stores the firmware that sets the hard configuration of the pipeline circuit. The memory **52** loads the firmware into the pipeline circuit **80** during the configuration of the accelerator **44**, and may receive modified firmware from the host processor **42** (**FIG. 3**) via the communication interface **82** during or after the configuration of the accelerator. The loading and
- 20 receiving of firmware is further discussed in previously cited U.S. Patent App. Serial Nos. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, 10/684,053 entitled COMPUTING MACHINE HAVING IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, and 10/684,057 entitled PROGRAMMABLE CIRCUIT AND
- 25 RELATED COMPUTING MACHINE AND METHOD.

- [69] Still referring to **FIG. 4**, the pipeline unit **78** may include a circuit board or card **98** on which are disposed the pipeline circuit **80**, data memory **92**, and firmware memory **52**. The circuit board **98** may be plugged into a pipeline-bus connector (not shown) much like a daughter card can be plugged into a slot of a
- 30 mother board in a personal computer (not shown). Although not shown, the pipeline unit **78** may include conventional ICs and components such as a power regulator

and a power sequencer; these ICs/components may also be disposed on the card **98** as is known.

[70] Further details of the structure and operation of the pipeline unit **78** are discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled  
5 PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[71] FIG. 5 is a block diagram of a pipeline unit **100** of the pipeline accelerator **44** of FIG. 3 according to another embodiment of the invention. The pipeline unit **100** is similar to the pipeline unit **78** of FIG. 4 except that the pipeline  
10 unit **100** includes multiple pipeline circuits **80** — here two pipeline circuits **80a** and **80b**. Increasing the number of pipeline circuits **80** typically allows an increase in the number  $n$  of hardwired pipelines **74<sub>1</sub>-74<sub>n</sub>**, and thus an increase in the functionality of the pipeline unit **100** as compared to the pipeline unit **78**. Furthermore, the pipeline unit **100** includes a firmware memory **52a** for the pipeline circuit **80a** and a firmware  
15 memory **52b** for the pipeline circuit **80b**. Alternatively, the pipeline circuits **80a** and **80b** may share a single firmware memory.

[72] In the pipeline unit **100**, the services components, *i.e.*, the communication interface **82**, the controller **86**, the exception manager **88**, the configuration manager **90**, and the optional industry-standard bus interface **91**, are  
20 disposed on the pipeline circuit **80a**, and the pipelines **74<sub>1</sub>-74<sub>n</sub>** and the communication shell **84** are disposed on the pipeline circuit **80b**. By locating the services components and the pipelines **74<sub>1</sub>-74<sub>n</sub>** on separate pipeline circuits **80a** and **80b**, respectively, one can include a higher number  $n$  of pipelines and/or more complex pipelines than he/she can where the service components and the pipelines  
25 are located on the same pipeline circuit. Alternatively, the portion of the communication shell **84** that interfaces the pipelines **74<sub>1</sub>-74<sub>n</sub>** to the interface **82** and to the controller **86** may be disposed on the pipeline circuit **80a**.

[73] Further details of the structure and operation of the pipeline unit **100** are discussed in previously cited U.S. Patent App. Serial No. 10/683,929 PIPELINE  
30 ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[74] FIG. 6 is a block diagram of the accelerator 44 of FIG. 3 having multiple pipeline units 78 (FIG. 4) or 100 (FIG. 5) according to an embodiment of the invention. For clarity, the accelerator 44 is discussed as having multiple pipeline units 78<sub>1</sub> – 78<sub>n</sub>, it being understood that the accelerator may include multiple pipeline units 100 or a combination of units 78 and 100. By including multiple pipeline units 78, one can increase the functionality and processing power of the accelerator 44 as compared to an accelerator having only one pipeline unit. Furthermore, because each pipeline unit 78 typically has a common industry-standard interface, one can easily modify the accelerator 44 by adding or removing pipeline units.

10 [75] In one implementation of the multiple-pipeline accelerator 44, the industry-standard bus interface 91 is omitted from each pipeline unit 78<sub>1</sub> – 78<sub>n</sub>, and a single external (to the pipeline units) interface 91 and communication bus 94 are common to all of the pipeline units. Including a single external bus interface 91 frees up resources on the pipeline circuits 80 (FIG. 4) as discussed above in conjunction  
15 with FIG. 4. The pipeline units 78<sub>1</sub> – 78<sub>n</sub> may all be disposed on a single circuit board (not shown in FIG. 6), each pipeline unit may be disposed on a respective circuit board, or groups of multiple pipeline units may be respectively disposed on multiple circuit boards. In the latter two implementations, the bus interface 91 is disposed on one of the circuit boards. Alternatively, the pipeline units 78<sub>1</sub> – 78<sub>n</sub> may  
20 each include a respective industry-standard bus interface 91 as discussed above in conjunction with FIG. 4, and thus may each communicate directly with the pipeline bus 50 or router 61 (FIG. 3). In this implementation, the pipeline units 78<sub>1</sub> – 78<sub>n</sub> may be disposed on a single or multiple circuit boards as discussed above.

[76] Each of the pipeline units 78<sub>1</sub> – 78<sub>n</sub> is a peer of the host processor 42  
25 (FIG. 3) and of each other. That is, each pipeline unit 78 can communicate directly with any other pipeline unit via the communication bus 94, and can communicate with the host processor 42 via the communication bus 94, the bus interface 91, the router 61 (if present), and the pipeline bus 50. Alternatively, where the pipeline units 78<sub>1</sub> – 78<sub>n</sub> each include a respective bus interface 91, then each pipeline unit can  
30 communicate directly with the host processor 42 via the router 61 (if present) and the pipeline bus 50.

[77] The operation of the multi-pipeline-unit accelerator **44** is now described by way of two examples.

[78] In a first example, the pipeline unit **78<sub>i</sub>** transfers data to the pipeline **78<sub>n</sub>**, which processes the data in a time-critical manner; thus, the pipeline units **78<sub>i</sub>** and **78<sub>n</sub>** use one or more SYNC signals to synchronize the data transfer and processing. Typically, a SYNC signal is fast enough to trigger a time-critical function, but requires significant hardware resources; comparatively, an event typically is not fast enough to trigger a time-critical function, but requires significantly fewer hardware resources. As discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, because a SYNC signal is routed directly from peer to peer, it can trigger a function more quickly than an event, which traverses, e.g., the pipeline bus **50** (FIG. 3), and the communication bus **94**. But because they are separately routed, the SYNC signals require dedicated circuitry, such as routing lines and buffers of the pipeline circuit **80** (FIG. 4). Conversely, because they use the existing data-transfer infrastructure (e.g. the pipeline bus **50** and the communication bus **94**), the events require fewer dedicated hardware resources. Consequently, designers tend to use events to trigger all but the most time-critical functions.

[79] First, the pipeline unit **78<sub>i</sub>** sends data to the pipeline unit **78<sub>n</sub>** by driving the data onto the communication bus **94**. Typically, the pipeline unit **78<sub>i</sub>** generates a message that includes the data and a header that contains the address of the pipeline unit **78<sub>n</sub>**. If the pipeline unit **78<sub>i</sub>** were to send the data to multiple pipeline units **78**, then it may do so in one of two ways. Specifically, the pipeline unit **78<sub>i</sub>** may sequentially send separate messages to each of the destination pipeline units **78**, each message including a header containing the address of a respective destination unit. Alternatively, the pipeline unit **78<sub>i</sub>** may simultaneously send the data to each of the destination pipeline units **78** by including in single message the data and a header containing the addresses of each destination pipeline unit. The sending of data is further discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[80] Next, the pipeline unit  $78_n$  receives the data. Because the pipeline units  $78_1 - 78_n$  are each coupled to the common communication bus 94, each pipeline unit  $78_2 - 78_n$  determines whether or not it is an intended recipient of the data. For example, each pipeline unit  $78_2 - 78_n$  determines whether its address is included in the header of the message. In this example, the units  $78_2 - 78_{n-1}$  determine that they are not intended recipients of the data, and thus ignore the data, *i.e.*, do not load the data into their data memories 92 (FIG. 4). Conversely, the pipeline unit  $78_n$  determines that it is an intended recipient of the data, and thus loads the data into its data memory 92. The receiving of data is discussed further in U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[81] Then, when the pipeline unit  $78_n$  is ready to process the received data, a peer, such as the pipeline unit  $78_1$ , or an external device (not shown) pulses a SYNC signal to cause the pipeline unit  $78_n$  to process the data in a timely manner. There exist a number of techniques by which the peer/device that pulses the SYNC signal may determine when the pipeline unit  $78_n$  is ready to process the received data. For example, the peer/device may merely pulse the SYNC signal a predetermined time after the pipeline unit  $78_1$  sends the data. Presumably, the predetermined time is long enough to allow the pipeline unit  $78_n$  to receive and load the data into its data memory 92 (FIG. 4). Alternatively, the pipeline unit  $78_n$  may pulse a SYNC signal to inform the peer/device that it is ready to process the received data.

[82] Next, in response to the pulsed SYNC signal, the pipeline unit  $78_n$  processes the received data. The processing of data by a pipeline unit is discussed further in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[83] Then, when the pipeline unit  $78_n$  is finished processing the data, a peer, an external device (not shown), or the unit  $78_n$  itself may pulse a SYNC signal to notify the pipeline unit  $78_1$  to send more data.



[84] In a second example, the host processor 42 (FIG. 3) transfers data to the pipeline 78<sub>n</sub>, which processes the data in a non-time-critical manner; thus the host processor and the pipeline unit 78<sub>n</sub> use one or more events to synchronize the data transfer and processing for the reasons discussed above.

5 [85] First, the host processor 42 (FIG. 3) sends data to the pipeline unit 78<sub>n</sub> by driving the data onto the pipeline bus 50 (FIG. 3). Typically, the host processor 42 generates a message that includes the data and a header containing the address of the pipeline unit 78<sub>n</sub>. If the host processor 42 were to send the data to multiple pipeline units 78, then it may do so in one of the two ways discussed above in  
10 conjunction with the first example.

[86] Next, the pipeline unit 78<sub>n</sub> receives the data from the pipeline bus 50 (FIG. 3) via the industry-standard bus interface 91 and the communication bus 94. Because the pipeline units 78<sub>1</sub> ... 78<sub>n</sub> are each coupled to the common communication bus 94, each pipeline unit determines whether it is an intended  
15 recipient of the data in the manner discussed above in conjunction with the first example.

[87] Then, when the pipeline unit 78<sub>n</sub> is ready to process the received data, a peer, such as the host processor 42 (FIG. 3), or an external device (not shown), generates an event on the pipeline bus 50 or directly on the communication bus 94  
20 to cause the pipeline unit 78<sub>n</sub> to process the data in a timely manner. There exist a number of techniques by which the peer/device that generates the event may determine when the pipeline unit 78<sub>n</sub> is ready to process the received data. For example, the peer/device may merely generate the event a predetermined time after the host processor 42 sends the data. Presumably, the predetermined time is long  
25 enough to allow the pipeline unit 78<sub>n</sub> to receive and load the data into its data memory 92 (FIG. 4). Alternatively, the pipeline unit 78<sub>n</sub> may generate an event to inform the peer/device that it is ready to process the received data.

[88] Next, the pipeline unit 78<sub>n</sub> receives the event. The receiving of an event is discussed in previously cited U.S. Patent App. Serial No.10/683,929 entitled  
30 PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[89] Then, in response to the received event, the pipeline unit **78<sub>n</sub>** processes the received data. The processing of data by a pipeline unit **78<sub>n</sub>** is discussed further in previously cited U.S. Patent Application Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING

5 ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[90] Next, when the pipeline unit **78<sub>n</sub>** is finished processing the data, a peer, an external device (not shown), or the unit **78<sub>n</sub>** itself may generate an event to notify the host processor **42** (FIG. 3) to send more data.

[91] Still referring to FIG. 6, alternative implementations of the accelerator **44** are contemplated. For example, although the above-discussed first and second examples of operation respectively use SYNC signals and events exclusively, it is contemplated that the accelerator **44** can use both SYNC signals and events in combination. Furthermore, other peers can use one or more of the multiple pipeline units **78** or **100** merely for bulk storage of data in their respective data memories **92**.  
10  
15 In addition, a designer may replace the host processor **42** (FIG. 3) with one or more of the pipeline units **78** or **100**, which together form a "host" peer that performs the functions of the host processor. Moreover, one or more of the pipeline units **78** or **100** may act as one or more message-distribution peers. For example, suppose that the host processor **42** generates a message for transmission to multiple subscriber  
20 peers. The host processor **42** may send the message to a message-distribution peer, which then distributes the message to each of the subscriber peers. Consequently, the message-distribution peer, not the host processor **42**, undertakes the burden of distributing the message, and thus allows the host processor to devote more time and resources to other tasks.

25 [92] FIG. 7 is a block diagram of the accelerator **44** (FIG. 3) having multiple pipeline units **78** (FIG. 4) or **100** (FIG. 5) according to another embodiment of the invention.

[93] The accelerator **44** of FIG. 7 is the same as the accelerator **44** of FIG. 6, except that the accelerator **44** of FIG. 7 includes a communication-bus router **110**  
30 for routing data between the pipeline units **78<sub>1</sub> – 78<sub>n</sub>** and other peers, such as the host processor **42** (FIG. 3), and devices (not shown) that are coupled to the pipeline bus **50** (FIG. 3). For clarity, the accelerator **44** of FIG. 7 is discussed as having

multiple pipeline units  $78_1 - 78_n$ , it being understood that the accelerator may include multiple pipeline units  $100$  or a combination of units  $78$  and  $100$ .

[94] The communication-bus router  $110$  is coupled to the pipeline units  $78_1 - 78_n$  via respective branches  $94_1 - 94_n$  of the communication bus  $94$ , and is coupled to the industry-standard bus interface  $91$  (if present) via a bus  $112$ . Alternatively, as discussed above in conjunction with FIG. 6, each pipeline unit  $78_1 - 78_n$  may include a respective interface  $91$  on board, and thus the external interface  $91$  can be omitted such that the router  $110$  is directly coupled to the pipeline bus  $50$  (or router  $61$  if present) of FIG. 3.

10 [95] The router  $110$  routes signals from the pipeline bus  $50$  (FIG. 3) to the respective destination pipeline unit or units  $78_1 - 78_n$ , and also routes signals from a source pipeline unit to one or more destination pipeline units or to the pipeline bus. Consequently, the router  $110$  offloads from each of the pipeline units  $78_1 - 78_n$  the function of determining whether a signal on the communication bus  $94$  is intended for  
15 that pipeline unit. This offloading may free up resources on the pipeline circuit  $80$  (FIG. 4) of each pipeline unit  $78_1 - 78_n$ , and thus may allow an increase in the functionality of each pipeline unit.

[96] Still referring to FIG. 7, the operation of the multi-pipeline-unit accelerator  $44$  with the router  $110$  is now described. Because the operation is  
20 similar to that described above for the accelerator  $44$  of FIG. 6, the below description highlights the operational differences between the accelerators of FIGS. 6 and 7.

[97] In a first example, the pipeline unit  $78_1$  transfers data to the pipeline  $78_n$ , which processes the data in a time-critical manner; thus, the pipeline units  $78_1$  and  $78_n$  use one or more SYNC signals to synchronize the data transfer and  
25 processing as discussed above in conjunction with the first example of FIG. 6.

[98] First, the pipeline unit  $78_1$  sends data to the pipeline unit  $78_n$  by driving the data onto the branch  $94_1$  of the communication bus. Typically, the pipeline unit  $78_1$  generates a message that includes the data and a header that contains the address of the pipeline unit  $78_n$ .

30 [99] Next, the router  $110$  receives the data, determines that the destination of the data is the pipeline unit  $78_n$ , and drives the data onto the branch  $94_n$  of the

communication bus. Typically, the router **110** determines the destination of the data by analyzing the header of the message containing the data and extracting the destination address from the header. Consequently, because the router **110** determines the proper destination of the data, the pipeline unit **78<sub>n</sub>** can merely  
5 accept the data from the router without determining whether it is an intended recipient of the data. Alternatively, the pipeline **78<sub>n</sub>** may determine whether it is an intended recipient of the data, and generate an exception (discussed in previously cited U.S. Patent App. Serial Nos. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, 10/684,053 entitled  
10 COMPUTING MACHINE HAVING IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, and 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD if it is not an intended recipient. The pipeline unit **78<sub>n</sub>** can send this exception to the host processor **42** (FIG. 3) via the router **110**, the  
15 industry-standard bus interface **91** (if present), the router **61** (if present), and the pipeline bus **50** (FIG. 3).

[100] Then, the pipeline unit **78<sub>n</sub>** loads the data from the bus branch **94<sub>n</sub>**. The loading of data by a pipeline unit is further discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR  
20 IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[101] Next, when the pipeline unit **78<sub>n</sub>** is ready to process the received data, a peer, such as the pipeline unit **78<sub>i</sub>**, or an external device (not shown) pulses a SYNC signal to cause the pipeline unit **78<sub>n</sub>** to process the data in a timely manner as  
25 discussed above in conjunction with the first example of FIG. 6.

[102] Then, in response to the pulsed SYNC signal, the pipeline unit **78<sub>n</sub>** processes the received data as discussed above in conjunction with the first example of FIG. 6.

[103] Next, when the pipeline unit **78<sub>n</sub>** is finished processing the data a peer, 30 an external device (not shown), or the unit **78<sub>n</sub>** itself may pulse a SYNC signal to notify the pipeline unit **78<sub>i</sub>** to send more data.

[104] In a second example, the host processor 42 (FIG. 3) transfers data to the pipeline 78<sub>n</sub>, which processes the data in a non-time-critical manner; thus the host processor and the pipeline unit 78<sub>n</sub> use one or more events to synchronize the data transfer and processing for the reasons discussed above in conjunction with

5 FIG. 6.

[105] First, the host processor 42 (FIG. 3) sends data to the pipeline unit 78<sub>n</sub> by driving the data onto the pipeline bus 50 (FIG. 3). Typically, the host processor 42 generates a message that includes the data and a header containing the address of the pipeline unit 78<sub>n</sub>.

10 [106] Next, the router 110 receives the data from the pipeline bus 50 (FIG. 3) via the industry-standard bus interface 91 (if present) and the bus 112.

[107] Then, the router 110 determines that the destination of the data is the pipeline unit 78<sub>n</sub>, and drives the data onto the branch 94<sub>n</sub> of the communication bus. Typically, the router 110 determines the destination of the header as discussed  
15 above in conjunction with the first example of FIG. 7. Consequently, because the router 110 determines the proper destination of the data, the pipeline unit 78<sub>n</sub> can merely accept the data from the router without determining whether it is an intended recipient of the data. Alternatively, the pipeline 78<sub>n</sub> may determine whether it is an intended recipient of the data, generate an exception (discussed in previously cited  
20 U.S. Patent App. Serial Nos. 10/684,102 entitled IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, 10/684,053 entitled COMPUTING MACHINE HAVING IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD, and 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED  
25 SYSTEM AND METHOD if it is not an intended recipient, and send the exception to the host processor 42 (FIG. 3) as discussed above in conjunction with the second example of FIG. 6.

[108] Next, the pipeline unit 78<sub>n</sub> loads the data from the bus branch 94<sub>n</sub>. The loading of data by a pipeline unit is further discussed in previously cited U.S. Patent  
30 App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[109] Then, when the pipeline unit  $78_n$  is ready to process the received data, a peer, such as the host processor **42** (FIG. 3), or an external device (not shown), generates an event on the pipeline bus **50** or on one of the branches  $94_i - 94_{n-1}$  of the communication bus to cause the unit  $78_n$  to process the data in a timely manner as discussed above in conjunction with the second example of FIG. 6.

[110] Next, the router **110** receives the event, determines that it is intended for the pipeline unit  $78_n$ , and drives the event onto the bus branch  $94_n$ .

[111] Then, the pipeline unit  $78_n$  loads the event from the bus branch  $94_n$ . The loading of an event by a pipeline unit **78** is discussed in previously cited U.S. Patent App. Serial No. 10/683,929 entitled PIPELINE ACCELERATOR FOR IMPROVED COMPUTING ARCHITECTURE AND RELATED SYSTEM AND METHOD.

[112] Next, in response to the received event, the pipeline unit  $78_n$  processes the received data.

[113] Then, when the pipeline unit  $78_n$  is finished processing the data, a peer, an external device (not shown), or the unit  $78_n$  itself may generate an event to notify the host processor **42** (FIG. 3) to send more data.

[114] Still referring to FIG. 7, although the first and second examples of operation respectively use SYNC signals and events exclusively, it is contemplated that the accelerator **44** can use a combination of both SYNC signals and events.

[115] FIG. 8 is a block diagram of the accelerator **44** of FIG. 3 including multiple groups **120** of multiple pipeline units **78** (FIG. 4) or **100** (FIG. 5) according to an embodiment of the invention. Including multiple groups **120** of pipeline units increases the functionality of the accelerator **44**, and allows a designer to increase the accelerator's efficiency by grouping pipeline units that perform related operations. For clarity, the accelerator **44** of FIG. 8 is discussed as having multiple pipeline units **78**, it being understood that the accelerator may include multiple pipeline units **100** or a combination of units **78** and **100**. Furthermore, the pipeline units **78** do not include industry-standard bus interfaces **91** (this interface is external in this embodiment), although they may in another embodiment.

- [116] The accelerator **44** includes six groups **120<sub>1</sub> – 120<sub>6</sub>** of pipeline units **78**, each group having three pipeline units and a respective intra-group communication-bus router **110<sub>1</sub> – 110<sub>6</sub>** that interconnects the pipeline units to each other and to the other pipeline-unit groups. Although the accelerator **44** is discussed as including six groups **120<sub>1</sub> – 120<sub>6</sub>** of three pipeline units **78** each, other implementations of the accelerator may include virtually any number of groups of any number pipeline units, and not all the groups need have the same number of pipeline units. Furthermore, the communication-bus routers **110<sub>1</sub>–110<sub>6</sub>** may be omitted as discussed above in conjunction with the accelerator **44** of FIG. 6.
- 10 [117] The pipeline-unit group **120<sub>1</sub>** includes three pipeline units **78<sub>1</sub> – 78<sub>3</sub>**, which are connected to an intra-group communication-bus router **110<sub>1</sub>** via branches **94<sub>1</sub>, 94<sub>2</sub>, and 94<sub>3</sub>**, respectively, of a communication bus in a manner similar to that discussed above in conjunction with FIG. 7. The other groups **120<sub>2</sub> – 120<sub>6</sub>** are similar.
- 15 [118] The communication-bus routers **110<sub>1</sub> – 110<sub>3</sub>** of the groups **120<sub>1</sub> – 120<sub>3</sub>** are connected to a first-level router **122<sub>1</sub>** via respective branches **124<sub>1</sub> – 124<sub>3</sub>** of a first-level bus **126<sub>1</sub>**. The router **122<sub>1</sub>** and bus **126<sub>1</sub>** allow the pipeline units **78<sub>1</sub> – 78<sub>9</sub>** to communicate with each other.
- 20 [119] Similarly, the communication-bus routers **110<sub>4</sub> – 110<sub>6</sub>** are connected to a first-level router **122<sub>2</sub>** via respective branches **128<sub>1</sub> – 128<sub>3</sub>** of a first-level bus **126<sub>2</sub>**. The router **122<sub>2</sub>** and bus **126<sub>2</sub>** allow the pipeline units **78<sub>10</sub> – 78<sub>18</sub>** to communicate with each other.
- 25 [120] The first-level routers **122<sub>1</sub>** and **122<sub>2</sub>** are connected to a second-level router **130** via respective branches **132<sub>1</sub> – 132<sub>2</sub>** of a second-level bus **134**. The router **130** and bus **134** allow the pipeline units **78<sub>1</sub> – 78<sub>18</sub>** to communicate with each other and with other peers/devices as discussed below.
- 30 [121] The pipeline bus **50** and a secondary pipeline bus **136** are coupled to the second-level router **130** via the respective industry-standard bus interfaces **91<sub>1</sub>** and **91<sub>2</sub>**. The secondary pipeline bus **136** may be connected to peers, such as the host processor **42** (FIG. 3), or peripherals, such as a hard-disk drive (not shown), that are not coupled to the pipeline bus **50**. Furthermore, either or both of the

busses **50** and **136** may be coupled to peers or peripherals via a network or the internet (neither shown) such that the accelerator **44** can be remotely located from other peers, such as the host processor **42** (FIG. 3).

[122] A bus **138** directly connects one or more SYNC signals to all of the pipeline units **78<sub>1</sub> – 78<sub>18</sub>** and to other peers, such as the host processor **42** (FIG. 3), or devices (not shown).

[123] Still referring to FIG. 8, in one example of operation, each group **120<sub>1</sub> – 120<sub>6</sub>** of pipeline units **78** processes data from a respective sensor of a sonar array (not shown) that is coupled to the secondary pipeline bus **136**. Because the pipeline units **78<sub>1</sub> – 78<sub>3</sub>** of the group **120<sub>1</sub>** are interconnected by a single router **110<sub>1</sub>**, these pipeline units can communicate with each other more quickly than they can with the pipeline units **78<sub>4</sub> – 78<sub>18</sub>** of the other groups **120<sub>2</sub> – 120<sub>6</sub>**. This higher communication speed is also present in each of the other groups **120<sub>2</sub> – 120<sub>6</sub>**. Consequently, a designer can increase the processing speed of the accelerator **44** by grouping together pipeline units that frequently transfer data or otherwise communicate among themselves.

[124] In general, the pipeline units **78<sub>1</sub> – 78<sub>18</sub>** communicate with each other and with peers, such as the host processor **42** (FIG. 3), and devices coupled to the buses **50** and **136** in a manner similar to that discussed above in conjunction with FIG. 7. For example, a sensor (not shown) coupled to the bus **136** communicates with the pipeline unit **78<sub>1</sub>** via the industry-standard bus interface **91<sub>1</sub>**, the second-level router **130**, the first level router **122<sub>1</sub>**, and the intra-group router **110<sub>1</sub>**. Similarly, the pipeline unit **78<sub>1</sub>** communicates with the pipeline unit **78<sub>7</sub>** via the routers **110<sub>1</sub>**, **122<sub>1</sub>**, and **110<sub>3</sub>**, and communicates with the pipeline unit **78<sub>10</sub>** via the routers **110<sub>1</sub>**, **122<sub>1</sub>**, **130**, **122<sub>2</sub>**, and **110<sub>4</sub>**.

[125] The preceding discussion is presented to enable a person skilled in the art to make and use the invention. Various modifications to the embodiments will be readily apparent to those skilled in the art, and the generic principles herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention. Thus, the present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.



## WHAT IS CLAIMED IS:

1. A pipeline accelerator, comprising:  
a communication bus; and  
a plurality of pipeline units each coupled to the communication bus and each  
5 comprising a respective hardwired-pipeline circuit.
2. The pipeline accelerator of claim 1 wherein each of the pipeline units  
comprises:  
a respective memory coupled to the hardwired-pipeline circuit; and  
wherein the hardwired-pipeline circuit is operable to,  
10 receive data from the communication bus,  
load the data into the memory,  
retrieve the data from the memory,  
process the retrieved data, and  
drive the processed data onto the communication bus.
- 15 3. The pipeline accelerator of claim 1 wherein each of the pipeline units  
comprises:  
a respective memory coupled to the hardwired-pipeline circuit; and  
wherein the hardwired-pipeline circuit is operable to,  
20 receive data from the communication bus,  
process the data,  
load the processed data into the memory,  
retrieve the processed data from the memory, and  
load the retrieved data onto the communication bus.
4. The pipeline accelerator of claim 1 wherein each of the  
25 hardwired-pipeline circuits is disposed on a respective field-programmable gate  
array.
5. The pipeline accelerator of claim 1, further comprising:  
a pipeline bus; and  
a pipeline-bus interface coupled to the communication bus and to the pipeline  
30 bus.

6. The pipeline accelerator of claim 1, further comprising:  
wherein the communication bus comprises a plurality of branches, a  
respective branch coupled to each pipeline unit; and  
a router coupled to each of the branches.
- 5 7. The pipeline accelerator of claim 1, further comprising:  
wherein the communication bus comprises a plurality of branches, a  
respective branch coupled to each pipeline unit;  
a router coupled to each of the branches;  
a pipeline bus; and  
10 a pipeline-bus interface coupled to the router and to the pipeline bus.
8. The pipeline accelerator of claim 1, further comprising:  
wherein the communication bus comprises a plurality of branches, a  
respective branch coupled to each pipeline unit;  
a router coupled to each of the branches;  
15 a pipeline bus;  
a pipeline-bus interface coupled to the router and to the pipeline bus; and  
a secondary bus coupled to the router.
9. The pipeline accelerator of claim 1 wherein:  
the communication bus is operable to receive data addressed to one of the  
20 pipeline units; and  
the one pipeline circuit is operable to accept the data; and  
the other pipeline circuits are operable to reject the data.
10. The pipeline accelerator of claim 1, further comprising:  
wherein the communication bus comprises a plurality of branches, a  
25 respective branch coupled to each pipeline unit;  
a router coupled to each of the branches and operable to,  
receive data addressed to one of the pipeline units, and  
provide the data to the one pipeline unit via the respective branch of  
the communication bus.
- 30 11. A computing machine, comprising:

a processor;  
a pipeline bus coupled to the processor; and  
a pipeline accelerator comprising,

- 5           a communication bus,  
          a pipeline-bus interface coupled between the pipeline bus and the  
communication bus, and  
          a plurality of pipeline units each coupled to the communication bus and  
each comprising a respective hardwired-pipeline circuit.

12.   The computing machine of claim 11 wherein:

- 10           the processor is operable to generate a message that identifies one of the  
pipeline units and to drive the message onto the pipeline bus;  
          the pipeline-bus interface is operable to couple the message to the  
communication bus;  
          the pipeline units are each operable to analyze the message;  
15           the identified pipeline unit is operable to accept the message; and  
          the other pipeline circuits are operable to reject the message.

13.   The computing machine of claim 11, further comprising:

- wherein the communication bus comprises a plurality of branches, a  
respective branch coupled to each pipeline unit;  
20           wherein the processor is operable to generate a message that identifies one  
of the pipeline units and to drive the message onto the pipeline bus; and  
          a router coupled to each of the branches and to the pipeline-bus interface and  
operable to receive the message from the pipeline-bus interface and to provide the  
message to the identified pipeline unit.

25           14.   The computing machine of claim 11, further comprising:

- wherein the communication bus comprises a plurality of branches, a  
respective branch coupled to each pipeline unit;  
          a secondary bus; and  
          a router coupled to each of the branches, to the pipeline-bus interface, and to  
30           the secondary bus.

15.   A method, comprising:

sending data to first of a plurality of pipeline units via a communication bus,  
each pipeline unit including a respective hardwired pipeline; and  
processing the data with the first pipeline unit.

16. The method of claim 15 wherein sending the data comprises:  
5 sending the data to a router; and  
providing the data to the first pipeline unit with the router via a respective first  
branch of the communication bus.

17. The method of claim 15 wherein sending the data comprises sending  
the data to the first pipeline unit with a processor.

- 10 18. The method of claim 15 wherein sending the data comprises sending  
the data to the first pipeline with a second of the plurality of pipeline units.

19. The method of claim 15, further comprising driving the processed data  
onto the communication bus with the first pipeline unit.

20. The method of claim 15 wherein processing the data with the first  
15 pipeline unit comprises:


receiving the data from the communication bus with a hardwired-pipeline  
circuit,  
loading the data into a memory with the hardwired-pipeline circuit,  
retrieving the data from the memory with the hardwired-pipeline circuit, and  
20 processing the retrieved data with the hardwired-pipeline circuit.

21. The method of claim 15, further comprising:  
wherein processing the data with the first pipeline unit comprises,  
receiving the data from the communication bus with a  
hardwired-pipeline circuit,  
25 processing the received data with the hardwired-pipeline circuit, and  
loading the processed data into a memory with the hardwired-pipeline  
circuit; and  
retrieving the processed data from the memory and driving the  
processed data onto the communication bus with the hardwired-pipeline circuit.

- 30 22. The method of claim 15, further comprising:

generating a message that includes the data and that identifies the first pipeline unit as a recipient of the message; and

wherein sending the data to the first pipeline unit comprises determining from the message that the first pipeline is a recipient of the message.

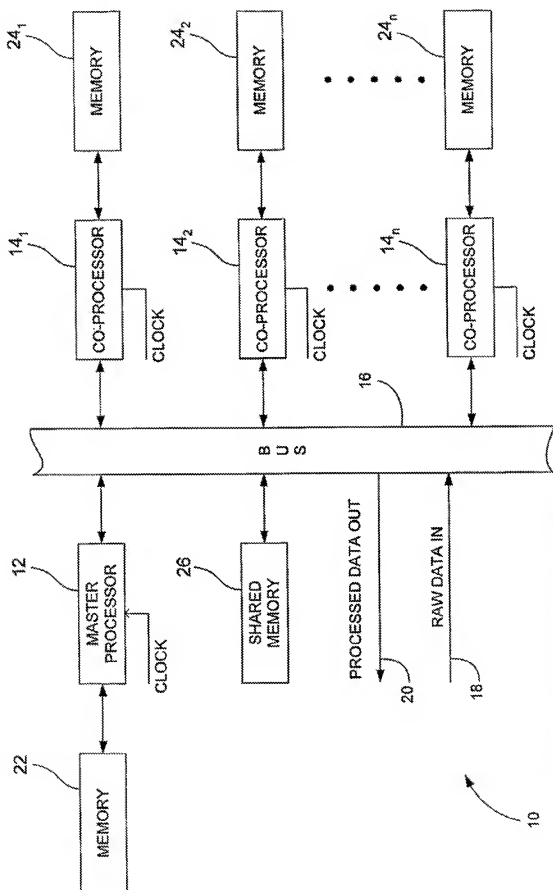**FIG. 1 (PRIOR ART)**

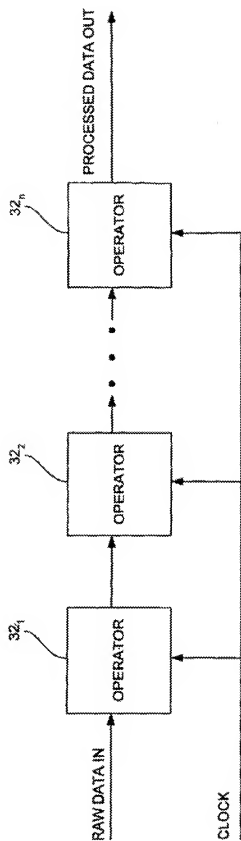


FIG. 2

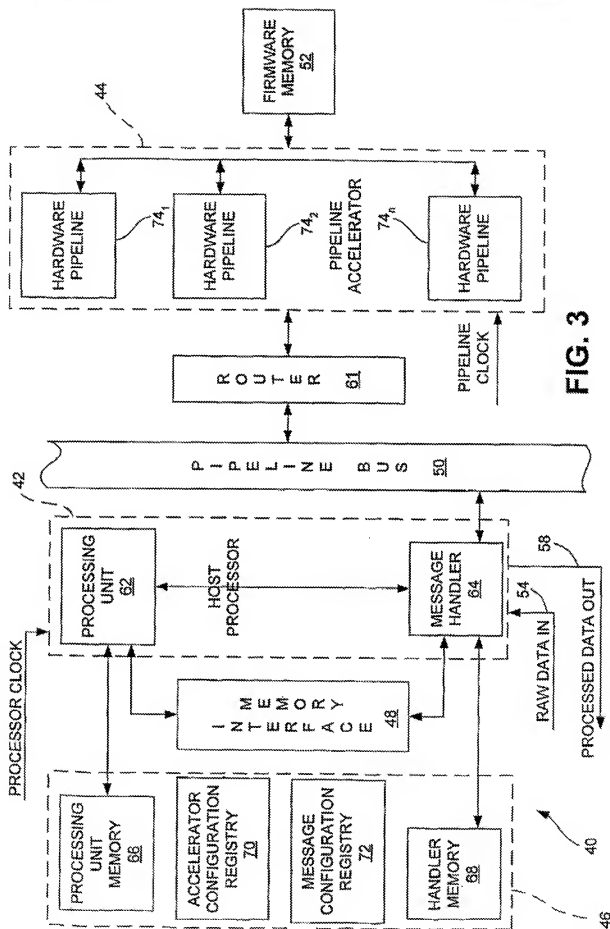


FIG. 3



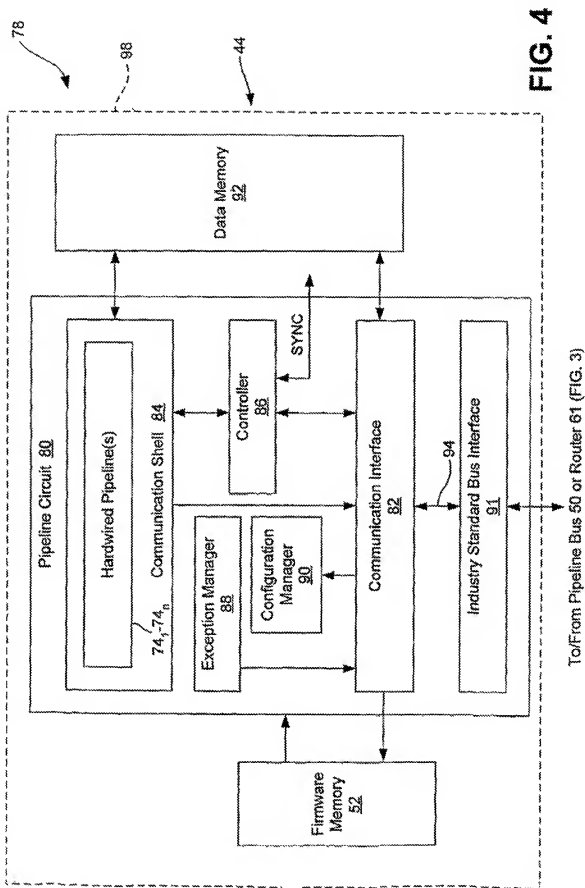
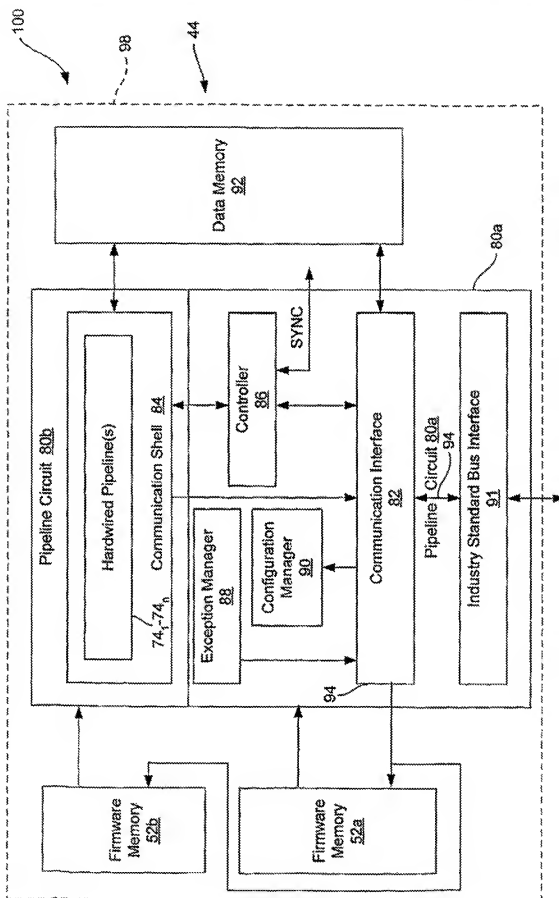
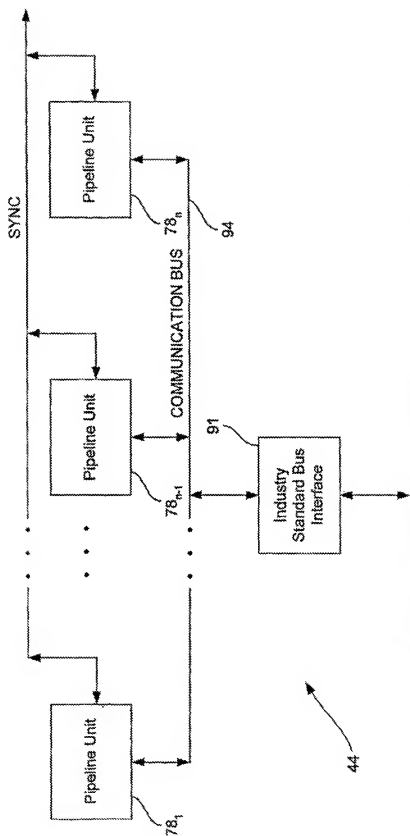



FIG. 4

To/From Pipeline Bus 50 or Router 61 (FIG. 3)

**FIG. 5**

To/From Pipeline Bus 50 or Router 61 (FIG. 3)

**FIG. 6**

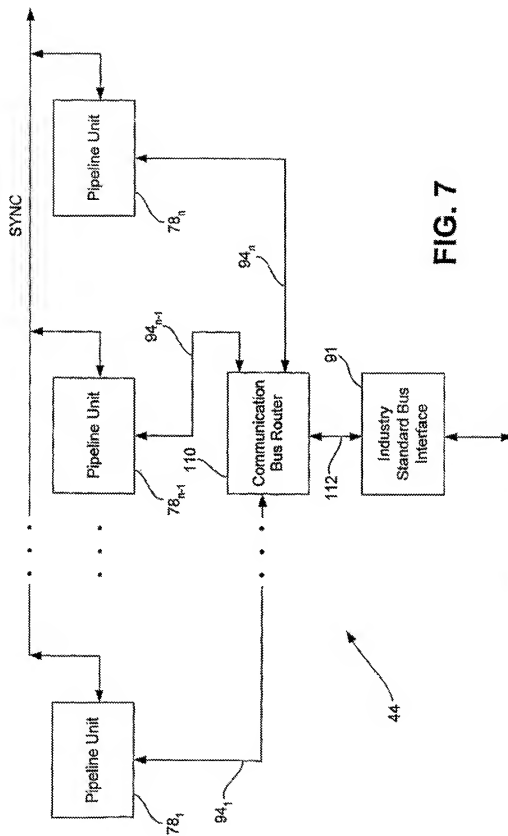

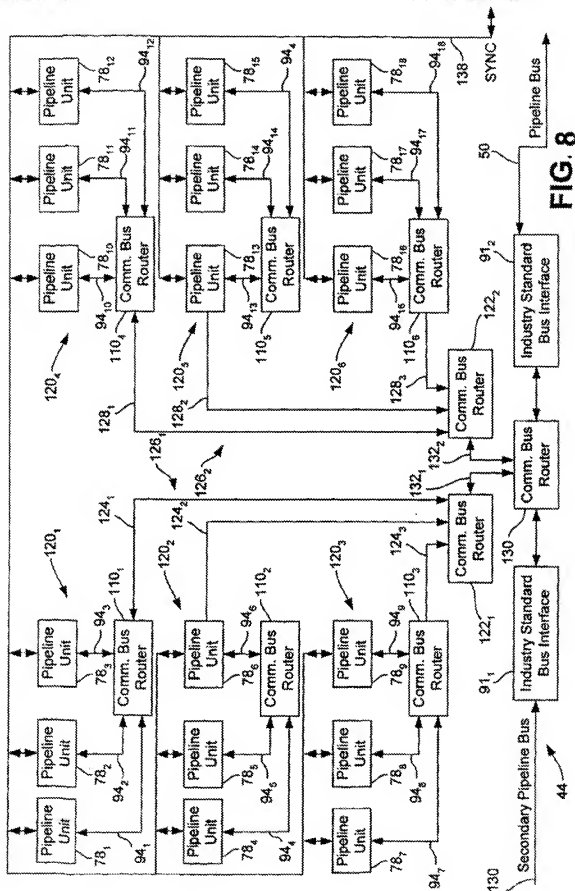


FIG. 8